



614.228.0185 | sales@multipress.com

MULTIPRESS

W6A Series Bench Presses

1-3 TON CAPACITIES

Built for your Application

The W6A series offers several models to suit a wide variety of applications, ranging from 1 to 3 tons. All adjustments, pressure and stroke positions are easily modified at the operator's position at the front of the press.

MULTIPRESS equipment is always built with our signature rugged, heavy duty construction, designed to meet demanding production schedules with years of trouble-free operation. *Contact us today to learn how MULTIPRESS can build a press to suit your requirements!*



W6A Models	W6A-1	W6A-1P*	W6A-2	W6A-2P	W6A-3	W6A-3P*
Max Tonnage	1	1	2	2	3	3
Daylight (in)	12	12	12	12	12	12
Stroke (in)	6	6	6	6	6	6
Advance Speed (IPM)	600	700	455	540	280	320
Press Speed (IPM)	120	140	75	80	50	50
Return Speed (IPM)	480	700	410	420	275	275
Pump	2/1	2/1	2/1	2/1	2/1	2/1
Motor HP	1	1	1	1	1	1
Cylinder:						
Bore Diameter (in)	1.5	1.5	2	2	2.5	2.5
Rod Diameter (in)	1	1	1.375	1.375	1.750	1.750
Positive Stop Rod Dia. (in)	–	.625	–	.625	–	.625
Maximum Pressure (PSI)	1131	1369	1273	1411	1222	1303
Minimum Pressure (PSI)	400	400	400	400	400	400
Reservoir Capacity (gal)	5.5	5.5	5.5	5.5	5.5	5.5
Approx. Shipping Wt. (lbs)	350	375	350	375	350	375


www.multipress.com

Standard Features

- Pressure regen (fast approach until work is contacted)
- Programmable logic controller with 16 I/O
- Standard NFPA cylinder
- Double gear pump mounted out of the oil for ease of service
- Quality control lower limit switch (allows operator to release buttons once ram is close to work to guarantee full press stroke)
- Open drip proof motor
- NEMA-4 enclosure- no disconnect
- Dual pushbuttons (anti-tie-down)
- Selector switch for jog up, jog down, run
- U-slot in bed
- 230/460 volts, 3 phase, 60 Hz
- 110 volts, single phase, 60Hz
- Available to operate with:
 - 230/460 volts, 3 phase, 60 Hz
 - 110 volts, single phase, 60 Hz

Customizable Press Options

- Stroke
- Daylight
- Solid bedplate (no U-slot)
- Removable bedplate
- Mounting bench
- Oil to water cooling coils
- Air to oil cooler
- Customized daylight, stroke & throat sizes
- Index table: 2,3,4,6,8,12 stop and servo
- Light curtains & other safety guards
- Positive cylinder stop assembly
- Ergonomic palm buttons
- Fused disconnect, NEMA-12 enclosure
- Bolster plates
- Load cell with digital read out

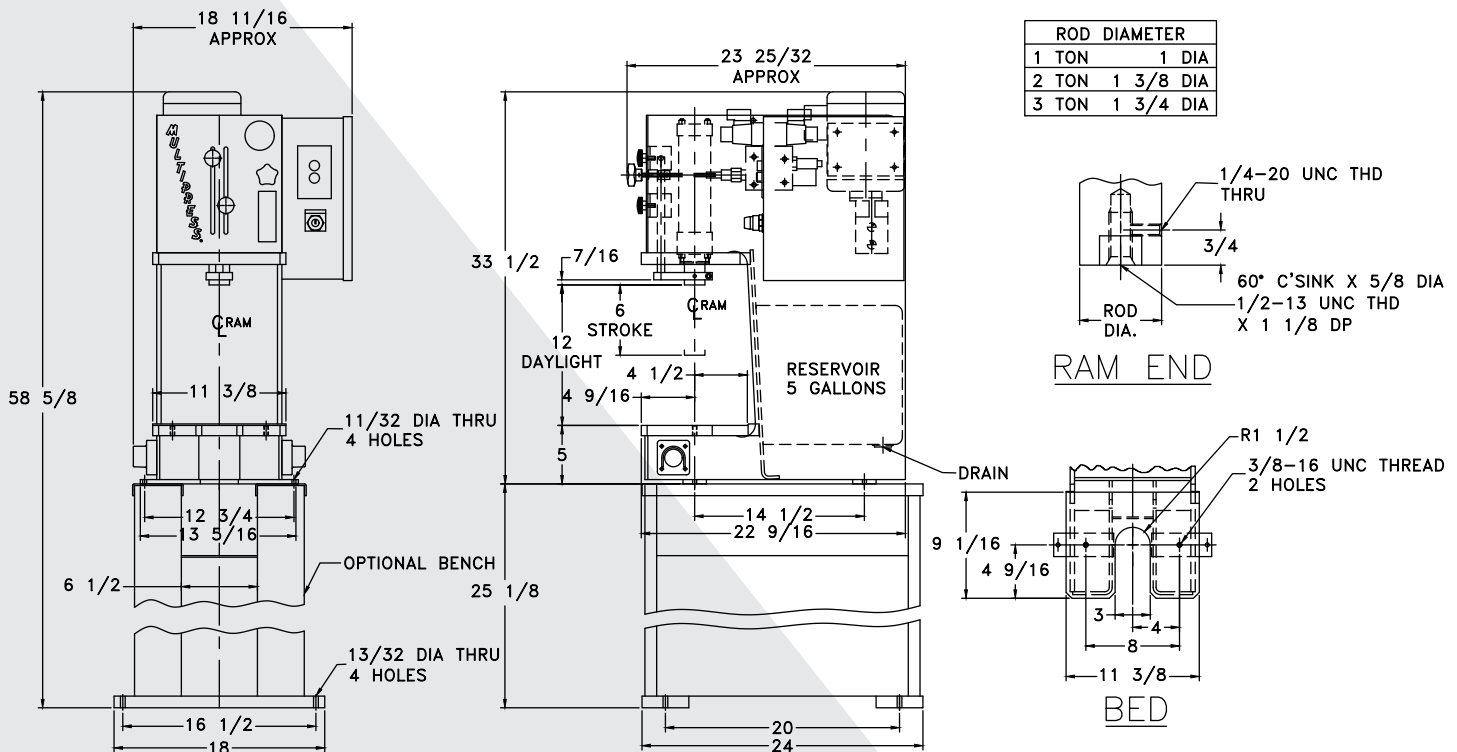

118-004 V0918